

# LED UFO High Bay

## Advantage

- Suitable for surface mounted.
- Ideal for Harsh Environment Applications.
- 130 lumens per watt help to reduce pay back period of energy saving.
- Excellent light distribution and uniformity.
- Special design for best heat dissipation and longer lifespan.
- 50000 hours working time and 5 years warranty.
- Optional 100% DR lens additive for impact resistance.
- Ideal for high moisture areas subject to the possibility of abuse.
- Built-in Constant Current LED Driver with High Efficient LED Module.
- Specialized on the rebate program in North American.



## Common Technical Data

|                       |                   |                            |                           |
|-----------------------|-------------------|----------------------------|---------------------------|
| Color Temperature     | 2700K to 5000K    | Input Voltage with ballast | 100-277V/200-480V         |
| Viewing Angle         | 120 degree        | Frequency                  | 50/60Hz                   |
| Color Consistency     | 4 steps           | Power Factor               | More than 0.99            |
| CRI                   | More than 80      | Rated Life                 | 5 years                   |
| Operation Temperature | -20-45°C          | LED Type                   | SMT LED                   |
| Efficiency            | More than 130 LPW | Housing                    | Aluminum                  |
| Ip65 Wet Location     |                   |                            | UL, cUL and FCC certified |

## Ordering Guide

|              |              |                    |                                     |
|--------------|--------------|--------------------|-------------------------------------|
| EV           | U            | 80W/100W/150W/200W | BDZ                                 |
| Company Code | Product Code | Wattage            | Housing option and dimming function |

## Warranty

This product has a warranty of period of 5 years from the date of purchase. The warranty is invalid in the case of improper use installation, tampering, and removal of the Q.C. date label, installation in an improper working environment or installation not according to the current edition of the National Electric Code. Should this product fail during the warranty period it will be replaced free of charge, subject to correct installation and return of the faulty unit.

Calgary Lighting Products does not accept responsibility for any installation costs associated with the replacement of this product. This warranty is in addition to the statutory rights in your country of purchase. Calgary Lighting Products reserves the right to alter specifications without prior notice.


Calgary Lighting Products  
5336 1A Street SW  
Calgary, Alberta  
T2H1Y5

Phone: 403-258-2988  
Toll-free: 1-800-267-2200  
sales@calgarylightingproducts.com  
www.calgarylightingproducts.com

## Common Technical Data

| Model             | EV-U80W BDZ               | EV-U100W BDZ          | EV-U150W BDZ          | EV-U200W BDZ          |
|-------------------|---------------------------|-----------------------|-----------------------|-----------------------|
| Power             | 80W                       | 100W                  | 150W                  | 200W                  |
| Lumens            | 10800                     | 13500                 | 20250                 | 27000                 |
| Size(inch)(D:WxH) | Diameter:15.01'x8.84'     | Diameter:15.01'x8.84' | Diameter:15.01'x8.84' | Diameter:15.01'x8.84' |
| Color Temp        | 3000K,4000K, 5000K, 5700K |                       |                       |                       |
| Housing           | AL and PC                 |                       |                       |                       |
| Operation Temp    | -30°C to 45°C             |                       |                       |                       |
| Life Span         | 50,000 hours              |                       |                       |                       |
| Driver            | High efficiency driver    |                       |                       |                       |
| Voltage range     | AC100-277V or AC200-480V  |                       |                       |                       |
| Frequency         | 50/60Hz                   |                       |                       |                       |
| Viewing Angle     | 120 degree                |                       |                       |                       |
| CRI               | >80                       |                       |                       |                       |
| PF                | ≥0.99                     |                       |                       |                       |
| Power Efficiency  | ≥90%                      |                       |                       |                       |

## Dimension

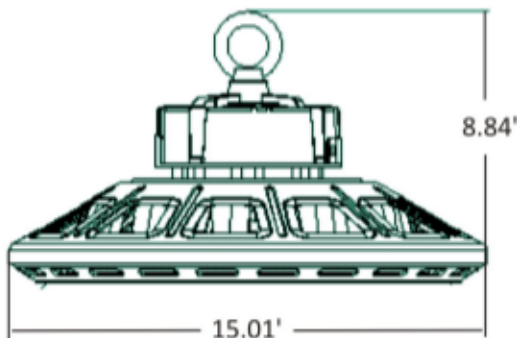

Calgary Lighting Products  
5336 1A Street SW  
Calgary, Alberta  
T2H1Y5

Phone: 403-258-2988  
Toll-free: 1-800-267-2200  
sales@calgarylightingproducts.com  
www.calgarylightingproducts.com